


**Flowrate / Pressure Calculation**

Water - Filterdisc 30 mm (20 deg. C)  
depending on Porosity Classification

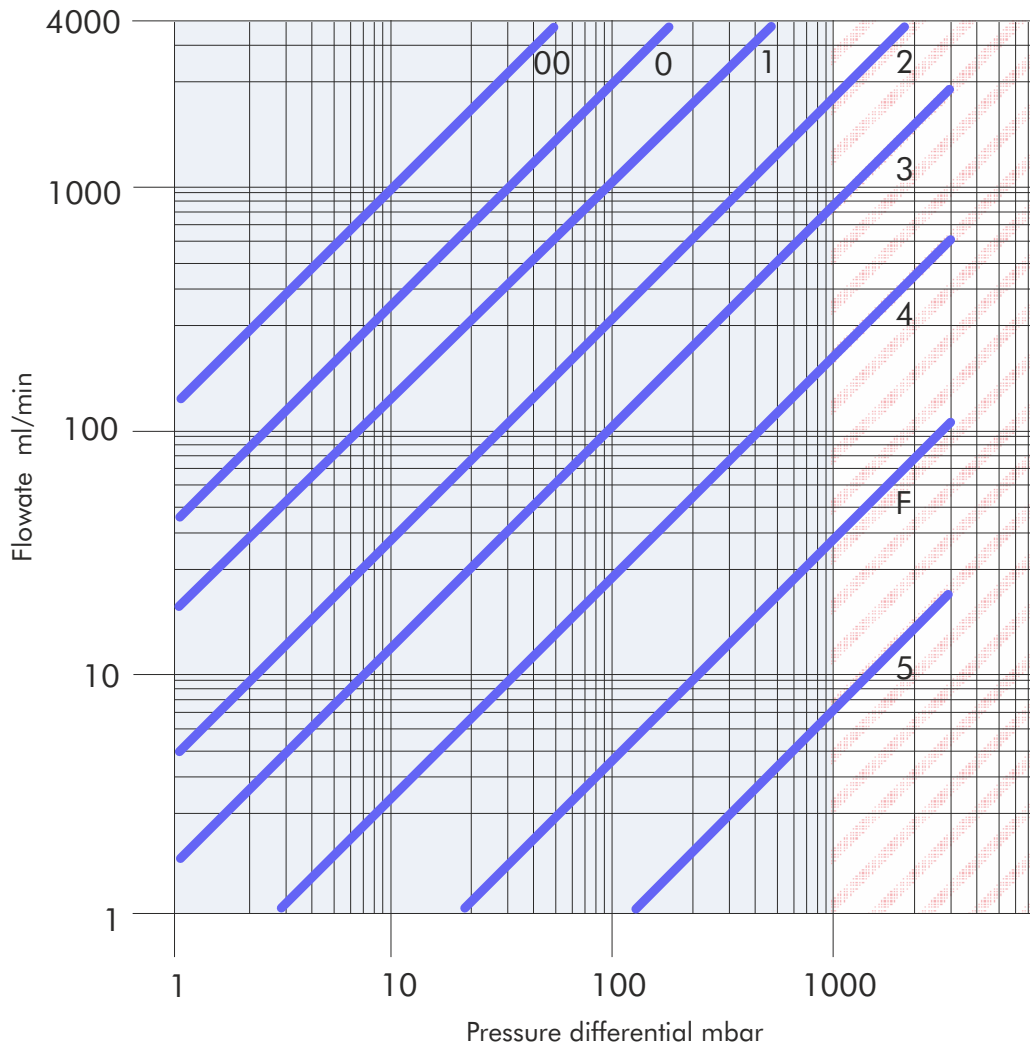

**Conversion Factor**

Diameter (mm)	10	20	30	40	50	60	90	120	175	200	250
Factor	0,13	0,55	1,00	1,50	2,50	4,30	6,80	9,70	15,00	16,30	17,40
Diameter (mm)	300	350	400	450							
Factor	25,00	26,70	30,60	32,50							

Attention !  
Standard max. pressure load **0,1 Mpa !**  
Diagrams only of approximate value !




ROBU Glasfilter-Geräte GmbH  
Schützenstrasse 13  
D - 57644 Hattert  
Germany

Tel. : +49 - (0)2662 - 8004-0  
Email : info@robuglas.com  
Web : http://www.robuglas.com



**Flowrate / Pressure Calculation**

*Dry air - Filterdisc 30 mm (20 deg. C)  
depending on Porosity Classification*

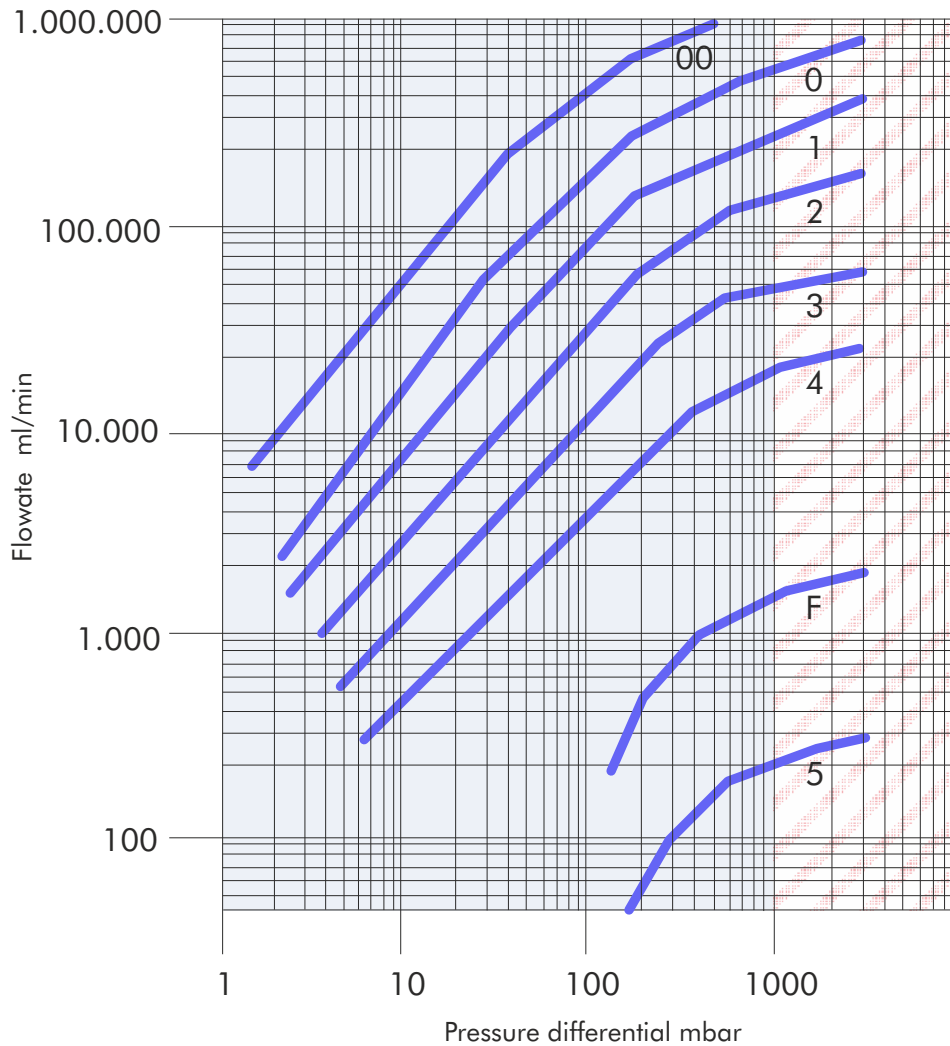

**Conversion Factor**

Diameter (mm)	10	20	30	40	50	60	90	120	175	200	250
Factor	0,13	0,55	1,00	1,50	2,50	4,30	6,80	9,70	15,00	16,30	17,40
Diameter (mm)	300	350	400	450							
Factor	25,00	26,70	30,60	32,50							

**Attention !**  
Standard max. pressure load **0,1 Mpa !**  
Diagrams only of approximate value !



ROBU Glasfilter-Geräte GmbH  
Schützenstrasse 13  
D - 57644 Hattert  
Germany

Tel. : +49 - (0)2662 - 8004-0  
Email : info@robuglas.com  
Web : http://www.robuglas.com

